

FEATURES

- High LED efficacy of 118lm/W
- ENEC approved 2 channel Dali DT8 driver
- LED module can be programmed in other CCT (2700-6500K)
- Dimmable to 0,1%

SPRINGS

Standard with GS spring (concrete/gyproc). Also available as above with WS spring (gyproc/metal).

Reflector
LV-TW 60°

Diffuser
LV-TW 80°

COLOURS

Available colours:

Matt white RAL 9016 (XX=MW)
Matt black RAL 9005 (XX=BL)

Linea 185 LV-TW


Fixed

SPECIFICATIONS

Beam angle (FWHM)	60° / 80°
Fixture material	Housing: Die cast aluminium / Reflector glass: Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C ¹
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Safety class	II
Energy class	These products contain a light source of energy efficiency class F (2700-6500K)

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

¹ In applications with a flat roof (f.i. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.




Only when the product is installed in a closed ceiling it may be exposed to water splashes, and only on its front side.

IP20

IP65

LINEA 185 LV-TW 2700-6500K

Downlight incl. PSU

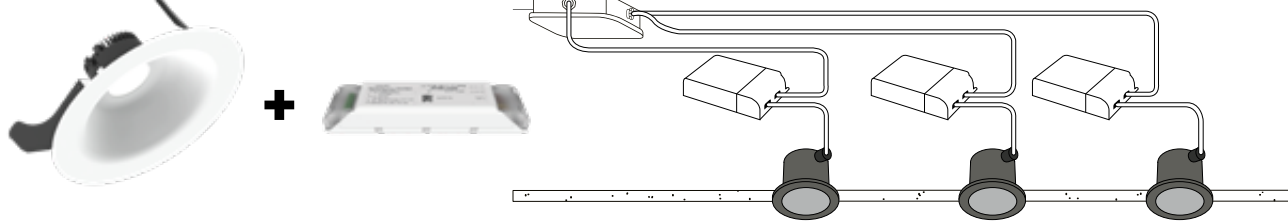

ITEM SPECIFICATIONS (PART A)

Description	Item code GS	Item code WS	Extra	Input	W	Lm	Lm/W	CRI (typ.)
Linea 185 LV-TW 2700-6500K 1250Lm 60° Dali	876A03XX2B02	876A03XX9W02	incl. PSU	220-240V	10,6	1250	118	93
Linea 185 LV-TW 2700-6500K 1250Lm 60° Casambi	876A03XX2C02	876A03XX9X02	incl. PSU	220-240V	10,6	1250	118	93
Linea 185 LV-TW 2700-6500K 1250Lm 80° Dali	876A03XX2D02	876A03XX9Y02	incl. PSU	220-240V	10,6	1250	118	93
Linea 185 LV-TW 2700-6500K 1250Lm 80° Casambi	876A03XX2E02	876A03XX9Z02	incl. PSU	220-240V	10,6	1250	118	93

ITEM SPECIFICATIONS (PART B)


Description	2700K				6500K				UGR	Pf	Ripple	Inrush	B16A
	R9	Rf	Rg	R15	R9	Rf	Rg	R15					
Linea 185 LV-TW 2700-6500K 1250Lm 60° Dali	54	92	100	87	64	91	98	90	16.6	0.90	<5%	200mA²s	106 pcs
Linea 185 LV-TW 2700-6500K 1250Lm 60° Casambi	54	92	100	87	64	91	98	90	16.6	0.90	<5%	200mA²s	106 pcs
Linea 185 LV-TW 2700-6500K 1250Lm 80° Dali	54	92	100	87	64	91	98	90	21.1	0.90	<5%	200mA²s	106 pcs
Linea 185 LV-TW 2700-6500K 1250Lm 80° Casambi	54	92	100	87	64	91	98	90	21.1	0.90	<5%	200mA²s	106 pcs

ITEM SPECIFICATIONS (PART C)

Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per carton	Expected Lifetime			Reported Lifetime*		
						L70B10	L80B10	L90B10	L70B10	L80B10	L90B10
Linea 185 LV-TW 2700-6500K 1250Lm	II	F	880 gr	233x233x85 mm	20 pcs	177.000 hrs	113.000 hrs	51.000 hrs	>102.000 hrs	>102.000 hrs	51.000 hrs

All values are measured at 230V (+/- 7%). *Based on 17.000hrs of LM80 testing at 700mA and a Tc85 °C.

DIMENSIONS

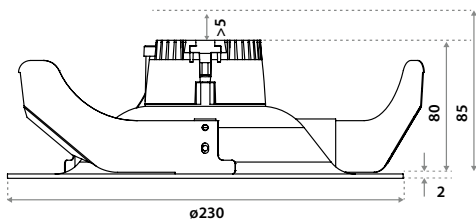

CUT-OUT



Using GS springs: Ø 170-175 mm.
Thickness ceiling 8-85 mm & recess depth 85 mm. For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.



Using WS springs. Ø 180-210 mm.
Thickness ceiling 1-35 & recess depth 85 mm. For soft ceiling tiles. We recommend taking down the ceiling tile before installing the product.