


FEATURES

- High CRI LED optimized towards TM30
- ENEC approved drivers
- Warm dim version to 1800K available

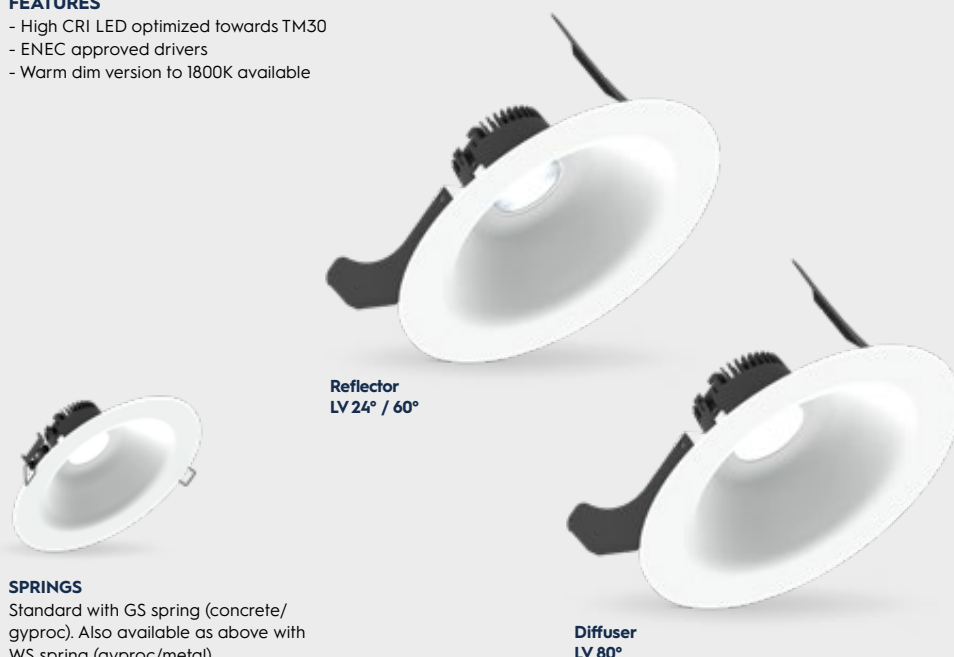

Reflector
LV 24° / 60°

Diffuser
LV 80°

COLOURS

Available colours:



Matt white RAL 9016 (XX=MW)
Matt black RAL 9005 (XX=BL)

SPRINGS

Standard with GS spring (concrete/gyproc). Also available as above with WS spring (gyproc/metal).

Linea 185 LV(-HE)


Fixed

SPECIFICATIONS

| | |
|----------------------------|---|
| Beam angle (FWHM) | 24° / 60° / 80° |
| Fixture material | Housing: Die cast aluminium / Reflector glass: Polycarbonate |
| Environment | Indoor |
| IK rate | IK03 |
| Operating temperature (Ta) | -20°C / +45°C ¹ |
| Safety marks | EN60598 / EN62031 / EN62471 |
| EMC compliance | EN55015 |
| Colour consistency (SDCM) | MacAdam step 3 |
| Warranty | 7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015) |
| Safety class | II |
| Energy class | These products contain a light source of energy efficiency class: CRI97 - G (1800-3000K) / F (2700K/3000K) / E (4000K) & CRI95 - D (2700K/3000K/4000K) |

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

¹ In applications with a flat roof (fi. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.



Only when the product is installed in a closed ceiling it may be exposed to water splashes, and only on its front side.

IP20

IP65

CRI95 VARIATIONS

| | |
|---|---------|
| Linea 185 LV-HE 2700K CRI95 1350/1825Lm | page 3 |
| Linea 185 LV-HE 2700K CRI95 2100/2600Lm | page 4 |
| Linea 185 LV-HE 2700K CRI95 3275Lm | page 5 |
| Linea 185 LV-HE 3000K CRI95 1375/1875Lm | page 6 |
| Linea 185 LV-HE 3000K CRI95 2150/2625Lm | page 7 |
| Linea 185 LV-HE 3000K CRI95 3275Lm | page 8 |
| Linea 185 LV-HE 4000K CRI95 1425L/1925m | page 9 |
| Linea 185 LV-HE 4000K CRI95 2200/2700Lm | page 10 |
| Linea 185 LV-HE 4000K CRI95 3375Lm | page 11 |

CRI97 VARIATIONS

| | |
|--------------------------------------|---------|
| Linea 185 LV 2700K CRI97 1150Lm | page 12 |
| Linea 185 LV 2700K CRI97 1625Lm | page 13 |
| Linea 185 LV 2700K CRI97 2050Lm | page 14 |
| Linea 185 LV 3000K CRI97 1250Lm | page 15 |
| Linea 185 LV 3000K CRI97 1800Lm | page 16 |
| Linea 185 LV 3000K CRI97 2250Lm | page 17 |
| Linea 185 LV 4000K CRI97 1350Lm | page 18 |
| Linea 185 LV 4000K CRI97 1925Lm | page 19 |
| Linea 185 LV 4000K CRI97 2400Lm | page 20 |
| Linea 185 LV 1800-3000K CRI97 1250Lm | page 21 |


CRI95 CHOOSE YOUR LV LUMEN OUTPUT

| | mA | W | Lumen Output | | | Lumen / Watt | | | UGR | | | Driver types | | | | |
|-----------------|-----|------|--------------|-------|-------|--------------|-------|-------|-------|------|------|--------------|--------------|--------------|--------|---------|
| | | | 2700K | 3000K | 4000K | 2700K | 3000K | 4000K | 3000K | | | No dim | Triac | 1-10V & Push | Dali | Casambi |
| | | | | | | | | | 24° | 60° | 80° | | | | | |
| Special request | 125 | 4,5 | 700 | 725 | 750 | 155 | 161 | 166 | 13,9 | 14,7 | 19,2 | 127570 | x | x | x | x |
| Special request | 150 | 5,5 | 850 | 875 | 900 | 154 | 159 | 164 | 14,5 | 15,4 | 19,9 | CC21W150-500 | x | x | 142014 | 142047 |
| Special request | 200 | 7,4 | 1125 | 1150 | 1175 | 152 | 156 | 159 | 15,5 | 16,3 | 20,8 | CC21W150-500 | on request | x | 142014 | 142047 |
| Standard | 250 | 9,3 | 1350 | 1375 | 1425 | 145 | 148 | 153 | 16,1 | 17,0 | 21,4 | CC21W150-500 | on request | 125400 | 142014 | 142047 |
| Special request | 300 | 11,3 | 1575 | 1625 | 1675 | 140 | 144 | 150 | 16,7 | 17,5 | 22,0 | 145192 | on request | 125400 | 142014 | 142047 |
| Special request | 350 | 13,2 | 1825 | 1875 | 1925 | 138 | 142 | 145 | 17,2 | 18,0 | 22,5 | 145192 | EC25CA-E1ZHP | 125400 | 142014 | 142047 |
| Standard | 400 | 15,2 | 2100 | 2150 | 2200 | 137 | 141 | 144 | 17,7 | 18,5 | 23,0 | 145192 | on request | 125400 | 142014 | 142047 |
| Special request | 450 | 17,3 | 2350 | 2400 | 2450 | 136 | 139 | 142 | 18,0 | 18,9 | 23,4 | 145192 | on request | 125400 | 142014 | 142047 |
| Special request | 500 | 19,3 | 2600 | 2625 | 2700 | 134 | 136 | 140 | 18,4 | 19,2 | 23,7 | 145192 | EC25CA-E1ZHP | 125400 | 142014 | 142047 |
| Special request | 550 | 21,4 | 2825 | 2900 | 2975 | 132 | 135 | 139 | 18,7 | 19,6 | 24,0 | 145192 | EC25CA-E1ZHP | 125400 | 142014 | 142047 |
| Special request | 600 | 23,6 | 3050 | 3125 | 3200 | 130 | 132 | 136 | 19,0 | 19,8 | 24,3 | 145192 | on request | 126421 | 142014 | 142047 |
| Standard | 650 | 25,7 | 3175 | 3275 | 3375 | 124 | 127 | 131 | 19,1 | 20,0 | 24,5 | 145192 | on request | 126421 | 142014 | 142047 |

CRI97 CHOOSE YOUR LV LUMEN OUTPUT

| | mA | W | Lumen Output | | | Lumen / Watt | | | UGR | | | Driver types | | | | |
|-----------------|-----|------|--------------|-------|-------|--------------|-------|-------|-------|------|------|--------------|--------------|--------------|--------|---------|
| | | | 2700K | 3000K | 4000K | 2700K | 3000K | 4000K | 3000K | | | No dim | Triac | 1-10V & Push | Dali | Casambi |
| | | | | | | | | | 24° | 60° | 80° | | | | | |
| Special request | 125 | 5,0 | 475 | 500 | 525 | 95 | 100 | 105 | 12,6 | 13,5 | 17,9 | 127570 | x | x | x | x |
| Special request | 150 | 6,1 | 550 | 575 | 625 | 91 | 95 | 103 | 13,1 | 13,9 | 18,4 | CC21W150-500 | x | x | 142014 | 142047 |
| Special request | 200 | 8,1 | 700 | 750 | 825 | 86 | 93 | 102 | 14,0 | 14,9 | 19,3 | CC21W150-500 | x | x | 142014 | 142047 |
| Special request | 250 | 9,8 | 850 | 900 | 1000 | 87 | 92 | 102 | 14,6 | 15,5 | 20,0 | CC21W150-500 | x | 125400 | 142014 | 142047 |
| Special request | 300 | 12,0 | 1050 | 1100 | 1200 | 88 | 92 | 100 | 15,3 | 16,2 | 20,7 | 145192 | x | 125400 | 142014 | 142047 |
| Standard | 350 | 13,8 | 1150 | 1250 | 1350 | 83 | 91 | 98 | 15,8 | 16,6 | 21,1 | 145192 | EC25CA-E1ZHP | 125400 | 142014 | 142047 |
| Special request | 400 | 15,8 | 1300 | 1425 | 1550 | 82 | 90 | 98 | 16,2 | 17,1 | 21,6 | 145192 | x | 125400 | 142014 | 142047 |
| Special request | 450 | 18,0 | 1475 | 1600 | 1750 | 82 | 89 | 97 | 16,6 | 17,5 | 22,0 | 145192 | x | 125400 | 142014 | 142047 |
| Standard | 500 | 20,1 | 1625 | 1800 | 1925 | 81 | 89 | 96 | 17,0 | 17,9 | 22,4 | 145192 | EC25CA-E1ZHP | 125400 | 142014 | 142047 |
| Special request | 550 | 21,7 | 1750 | 1900 | 2050 | 80 | 87 | 94 | 17,2 | 18,1 | 22,6 | 145192 | EC25CA-E1ZHP | 125400 | 142014 | 142047 |
| Special request | 600 | 23,9 | 1900 | 2050 | 2225 | 80 | 86 | 93 | 17,5 | 18,4 | 22,8 | 145192 | x | 126421 | 142014 | 142047 |
| Standard | 650 | 26,0 | 2050 | 2250 | 2400 | 79 | 86 | 92 | 17,8 | 18,7 | 23,1 | 145192 | x | 126421 | 142014 | 142047 |

DIMENSIONS

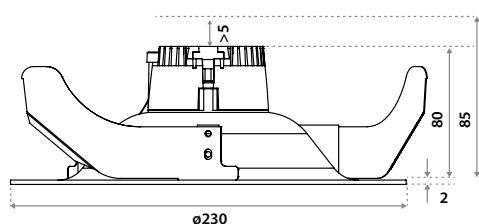

CUT-OUT



Using **GS springs**: Ø 170-175 mm.
Thickness ceiling 8-85 mm & recess depth 85 mm. For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.





Using **WS springs**: Ø 180-210 mm.
Thickness ceiling 1-35 mm & recess depth 85 mm. For soft ceiling tiles. We recommend taking down the ceiling tile before installing the product.

LINEA 185 LV-HE

2700K CRI95 1350/1825LM

Downlight incl. PSU

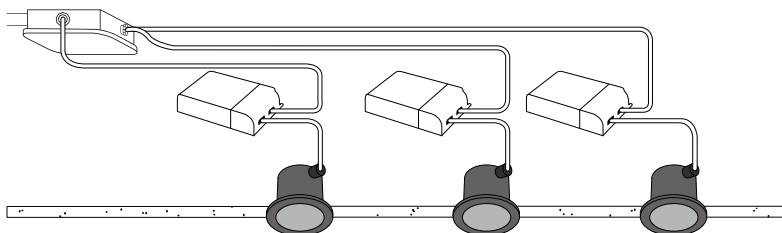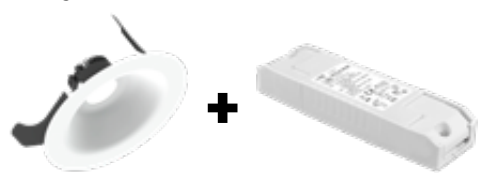

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° No dim | 87SA03XX2U02 | 87SA03XX9K02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1825Lm CRI95 24° Triac | 87SA03XX2K02 | 87SA03XX9A02 | incl. PSU | 220-240V | 350 | 13,2 | 1825 | 138 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° 1-10V & Push | 87SA03XX2X02 | 87SA03XX9T02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° Dali | 87SA03XX2L02 | 87SA03XX9B02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° Casambi | 87SA03XX2M02 | 87SA03XX9C02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° No dim | 87SA03XX2V02 | 87SA03XX9L02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1825Lm CRI95 60° Triac | 87SA03XX2N02 | 87SA03XX9D02 | incl. PSU | 220-240V | 350 | 13,2 | 1825 | 138 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° 1-10V & Push | 87SA03XX2Y02 | 87SA03XX9U02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° Dali | 87SA03XX2P02 | 87SA03XX9E02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° Casambi | 87SA03XX2Q02 | 87SA03XX9F02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° No dim | 87SA03XX2W02 | 87SA03XX9M02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1825Lm CRI95 80° Triac | 87SA03XX2R02 | 87SA03XX9G02 | incl. PSU | 220-240V | 350 | 13,2 | 1825 | 138 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° 1-10V & Push | 87SA03XX2Z02 | 87SA03XX9V02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° Dali | 87SA03XX2S02 | 87SA03XX9H02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° Casambi | 87SA03XX2T02 | 87SA03XX9J02 | incl. PSU | 220-240V | 250 | 9,3 | 1350 | 145 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|----|-----|------|------|--------|------------|--------|
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° No dim | 69 | 93 | 99 | 92 | 16.0 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 2700K 1825Lm CRI95 24° Triac | 69 | 93 | 99 | 92 | 17.1 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° 1-10V & Push | 69 | 93 | 99 | 92 | 16.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° Dali | 69 | 93 | 99 | 92 | 16.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 24° Casambi | 69 | 93 | 99 | 92 | 16.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° No dim | 69 | 93 | 99 | 92 | 16.9 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 2700K 1825Lm CRI95 60° Triac | 69 | 93 | 99 | 92 | 18.0 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° 1-10V & Push | 69 | 93 | 99 | 92 | 16.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° Dali | 69 | 93 | 99 | 92 | 16.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 60° Casambi | 69 | 93 | 99 | 92 | 16.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° No dim | 69 | 93 | 99 | 92 | 21.4 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 2700K 1825Lm CRI95 80° Triac | 69 | 93 | 99 | 92 | 22.4 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° 1-10V & Push | 69 | 93 | 99 | 92 | 21.4 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° Dali | 69 | 93 | 99 | 92 | 21.4 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 2700K 1350Lm CRI95 80° Casambi | 69 | 93 | 99 | 92 | 21.4 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 2700K 1350Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |
| Linea 185 LV-HE 2700K 1825Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |



All values are measured at 230V (+/- 7%). * Based on 19.000hrs of Lm80 testing at 1200mA and a Tc85°C.

30-04-2026

LINEA 185 LV-HE

2700K CRI95 2100/2600LM

Downlight incl. PSU

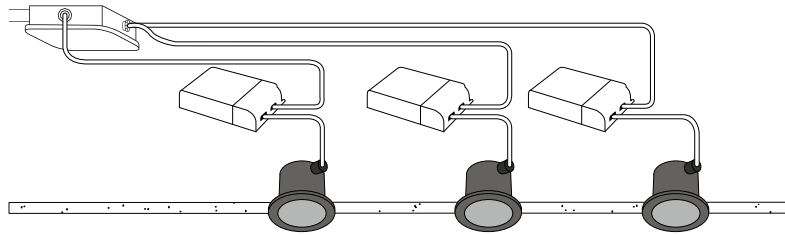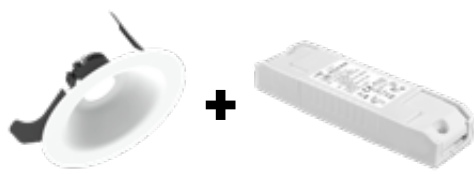

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° No dim | 87SG03XX2U02 | 87SG03XX9K02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2600Lm CRI95 24° Triac | 87SG03XX2K02 | 87SG03XX9A02 | incl. PSU | 220-240V | 500 | 19,3 | 2600 | 134 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° 1-10V & Push | 87SG03XX2X02 | 87SG03XX9T02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° Dali | 87SG03XX2L02 | 87SG03XX9B02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° Casambi | 87SG03XX2M02 | 87SG03XX9C02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° No dim | 87SG03XX2V02 | 87SG03XX9L02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2600Lm CRI95 60° Triac | 87SG03XX2N02 | 87SG03XX9D02 | incl. PSU | 220-240V | 500 | 19,3 | 2600 | 134 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° 1-10V & Push | 87SG03XX2Y02 | 87SG03XX9U02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° Dali | 87SG03XX2P02 | 87SG03XX9E02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° Casambi | 87SG03XX2Q02 | 87SG03XX9F02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° No dim | 87SG03XX2W02 | 87SG03XX9M02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2600Lm CRI95 80° Triac | 87SG03XX2R02 | 87SG03XX9G02 | incl. PSU | 220-240V | 500 | 19,3 | 2600 | 134 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° 1-10V & Push | 87SG03XX2Z02 | 87SG03XX9V02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° Dali | 87SG03XX2S02 | 87SG03XX9H02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° Casambi | 87SG03XX2T02 | 87SG03XX9J02 | incl. PSU | 220-240V | 400 | 15,2 | 2100 | 137 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|----|-----|------|------|--------|------------|--------|
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° No dim | 69 | 93 | 99 | 92 | 17.6 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 2700K 2600Lm CRI95 24° Triac | 69 | 93 | 99 | 92 | 18.3 | 0.95 | <9% | 8.4A 544µS | 85 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° 1-10V & Push | 69 | 93 | 99 | 92 | 17.6 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° Dali | 69 | 93 | 99 | 92 | 17.6 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 24° Casambi | 69 | 93 | 99 | 92 | 17.6 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° No dim | 69 | 93 | 99 | 92 | 18.4 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 2700K 2600Lm CRI95 60° Triac | 69 | 93 | 99 | 92 | 19.2 | 0.95 | <9% | 8.4A 544µS | 85 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° 1-10V & Push | 69 | 93 | 99 | 92 | 18.4 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° Dali | 69 | 93 | 99 | 92 | 18.4 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 60° Casambi | 69 | 93 | 99 | 92 | 18.4 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° No dim | 69 | 93 | 99 | 92 | 22.9 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 2700K 2600Lm CRI95 80° Triac | 69 | 93 | 99 | 92 | 23.6 | 0.95 | <9% | 8.4A 544µS | 85 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° 1-10V & Push | 69 | 93 | 99 | 92 | 22.9 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° Dali | 69 | 93 | 99 | 92 | 22.9 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 2100Lm CRI95 80° Casambi | 69 | 93 | 99 | 92 | 22.9 | 0.95 | <3% | 5A 50µS | 50 pcs |

ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 2700K 2100Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |
| Linea 185 LV-HE 2700K 2600Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |



All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

30-04-2026

LINEA 185 LV-HE

2700K CRI95 3175LM

Downlight incl. PSU

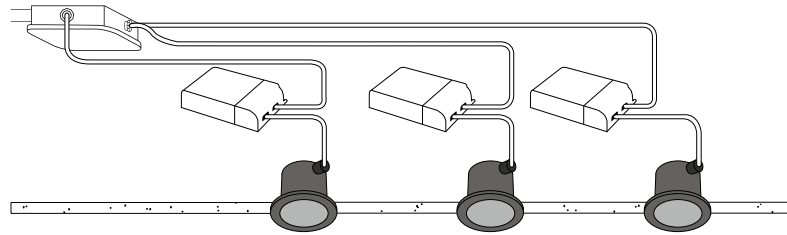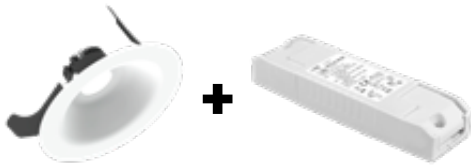

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° No dim | 87SV03XX2U02 | 87SV03XX9K02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° 1-10V & Push | 87SV03XX2X02 | 87SV03XX9T02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° Dali | 87SV03XX2L02 | 87SV03XX9B02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° Casambi | 87SV03XX2M02 | 87SV03XX9C02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° No dim | 87SV03XX2V02 | 87SV03XX9L02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° 1-10V & Push | 87SV03XX2Y02 | 87SV03XX9U02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° Dali | 87SV03XX2P02 | 87SV03XX9E02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° Casambi | 87SV03XX2Q02 | 87SV03XX9F02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° No dim | 87SV03XX2W02 | 87SV03XX9M02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° 1-10V & Push | 87SV03XX2Z02 | 87SV03XX9V02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° Dali | 87SV03XX2S02 | 87SV03XX9H02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° Casambi | 87SV03XX2T02 | 87SV03XX9J02 | incl. PSU | 220-240V | 650 | 25,7 | 3175 | 124 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|----|-----|------|------|--------|---------|--------|
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° No dim | 69 | 93 | 99 | 92 | 19.0 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° 1-10V & Push | 69 | 93 | 99 | 92 | 19.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° Dali | 69 | 93 | 99 | 92 | 19.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 24° Casambi | 69 | 93 | 99 | 92 | 19.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° No dim | 69 | 93 | 99 | 92 | 19.9 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° 1-10V & Push | 69 | 93 | 99 | 92 | 19.9 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° Dali | 69 | 93 | 99 | 92 | 19.9 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 60° Casambi | 69 | 93 | 99 | 92 | 19.9 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° No dim | 69 | 93 | 99 | 92 | 24.3 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° 1-10V & Push | 69 | 93 | 99 | 92 | 24.3 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° Dali | 69 | 93 | 99 | 92 | 24.3 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 2700K 3175Lm CRI95 80° Casambi | 69 | 93 | 99 | 92 | 24.3 | 0.95 | <3% | 5A 50µS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 2700K 3175Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |

All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

LINEA 185 LV-HE

3000K CRI95 1375/1875LM

Downlight incl. PSU

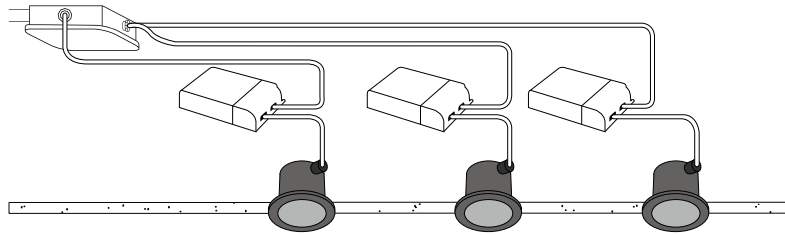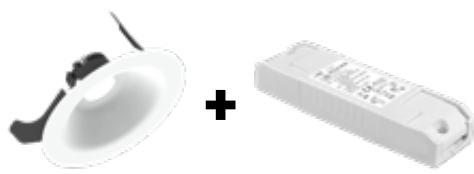

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° No dim | 87SB03XX2U02 | 87SB03XX9K02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1875Lm CRI95 24° Triac | 87SB03XX2K02 | 87SB03XX9A02 | incl. PSU | 220-240V | 350 | 13,2 | 1875 | 142 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° 1-10V & Push | 87SB03XX2X02 | 87SB03XX9T02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° Dali | 87SB03XX2L02 | 87SB03XX9B02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° Casambi | 87SB03XX2M02 | 87SB03XX9C02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° No dim | 87SB03XX2V02 | 87SB03XX9L02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1875Lm CRI95 60° Triac | 87SB03XX2N02 | 87SB03XX9D02 | incl. PSU | 220-240V | 350 | 13,2 | 1875 | 142 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° 1-10V & Push | 87SB03XX2Y02 | 87SB03XX9U02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° Dali | 87SB03XX2P02 | 87SB03XX9E02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° Casambi | 87SB03XX2Q02 | 87SB03XX9F02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° No dim | 87SB03XX2W02 | 87SB03XX9M02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1875Lm CRI95 80° Triac | 87SB03XX2R02 | 87SB03XX9G02 | incl. PSU | 220-240V | 350 | 13,2 | 1875 | 142 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° 1-10V & Push | 87SB03XX2Z02 | 87SB03XX9V02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° Dali | 87SB03XX2S02 | 87SB03XX9H02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° Casambi | 87SB03XX2T02 | 87SB03XX9J02 | incl. PSU | 220-240V | 250 | 9,3 | 1375 | 148 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° No dim | 80 | 91 | 101 | 95 | 16.1 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 3000K 1875Lm CRI95 24° Triac | 80 | 91 | 101 | 95 | 17.2 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° 1-10V & Push | 80 | 91 | 101 | 95 | 16.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° Dali | 80 | 91 | 101 | 95 | 16.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 24° Casambi | 80 | 91 | 101 | 95 | 16.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° No dim | 80 | 91 | 101 | 95 | 17.0 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 3000K 1875Lm CRI95 60° Triac | 80 | 91 | 101 | 95 | 18.0 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° 1-10V & Push | 80 | 91 | 101 | 95 | 17.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° Dali | 80 | 91 | 101 | 95 | 17.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 60° Casambi | 80 | 91 | 101 | 95 | 17.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° No dim | 80 | 91 | 101 | 95 | 21.4 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 3000K 1875Lm CRI95 80° Triac | 80 | 91 | 101 | 95 | 22.5 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° 1-10V & Push | 80 | 91 | 101 | 95 | 21.4 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° Dali | 80 | 91 | 101 | 95 | 21.4 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 3000K 1375Lm CRI95 80° Casambi | 80 | 91 | 101 | 95 | 21.4 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 3000K 1375Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |
| Linea 185 LV-HE 3000K 1875Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |



All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

30-04-2026

LINEA 185 LV-HE

3000K CRI95 2150/2625LM

Downlight incl. PSU

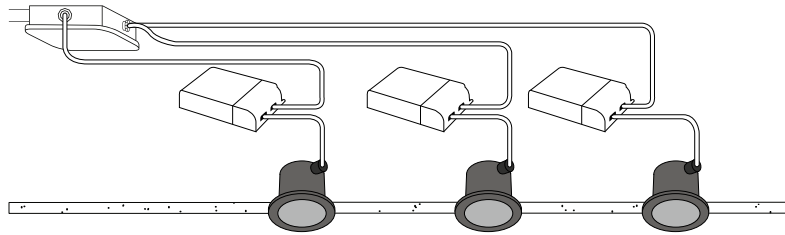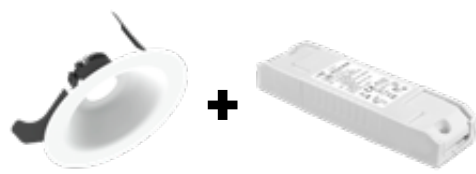

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° No dim | 87SL03XX2U02 | 87SL03XX9K02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2625Lm CRI95 24° Triac | 87SL03XX2K02 | 87SL03XX9A02 | incl. PSU | 220-240V | 500 | 19,3 | 2625 | 136 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° 1-10V & Push | 87SL03XX2X02 | 87SL03XX9T02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° Dali | 87SL03XX2L02 | 87SL03XX9B02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° Casambi | 87SL03XX2M02 | 87SL03XX9C02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° No dim | 87SL03XX2V02 | 87SL03XX9L02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2625Lm CRI95 60° Triac | 87SL03XX2N02 | 87SL03XX9D02 | incl. PSU | 220-240V | 500 | 19,3 | 2625 | 136 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° 1-10V & Push | 87SL03XX2Y02 | 87SL03XX9U02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° Dali | 87SL03XX2P02 | 87SL03XX9E02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° Casambi | 87SL03XX2Q02 | 87SL03XX9F02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° No dim | 87SL03XX2W02 | 87SL03XX9M02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2625Lm CRI95 80° Triac | 87SL03XX2R02 | 87SL03XX9G02 | incl. PSU | 220-240V | 500 | 19,3 | 2625 | 136 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° 1-10V & Push | 87SL03XX2Z02 | 87SL03XX9V02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° Dali | 87SL03XX2S02 | 87SL03XX9H02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° Casambi | 87SL03XX2T02 | 87SL03XX9J02 | incl. PSU | 220-240V | 400 | 15,2 | 2150 | 141 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° No dim | 80 | 91 | 101 | 95 | 17.7 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 3000K 2625Lm CRI95 24° Triac | 80 | 91 | 101 | 95 | 18.4 | 0.95 | <9% | 8.4A 544µS | 85 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° 1-10V & Push | 80 | 91 | 101 | 95 | 17.7 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° Dali | 80 | 91 | 101 | 95 | 17.7 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 24° Casambi | 80 | 91 | 101 | 95 | 17.7 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° No dim | 80 | 91 | 101 | 95 | 18.5 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 3000K 2625Lm CRI95 60° Triac | 80 | 91 | 101 | 95 | 19.2 | 0.95 | <9% | 8.4A 544µS | 85 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° 1-10V & Push | 80 | 91 | 101 | 95 | 18.5 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° Dali | 80 | 91 | 101 | 95 | 18.5 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 60° Casambi | 80 | 91 | 101 | 95 | 18.5 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° No dim | 80 | 91 | 101 | 95 | 23.0 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 3000K 2625Lm CRI95 80° Triac | 80 | 91 | 101 | 95 | 23.7 | 0.95 | <9% | 8.4A 544µS | 85 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° 1-10V & Push | 80 | 91 | 101 | 95 | 23.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° Dali | 80 | 91 | 101 | 95 | 23.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 2150Lm CRI95 80° Casambi | 80 | 91 | 101 | 95 | 23.0 | 0.95 | <3% | 5A 50µS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 3000K 2150Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |
| Linea 185 LV-HE 3000K 2625Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |

All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

30-04-2026

LINEA 185 LV-HE

Downlight incl. PSU

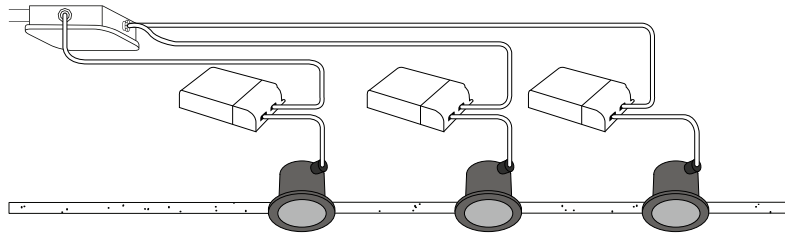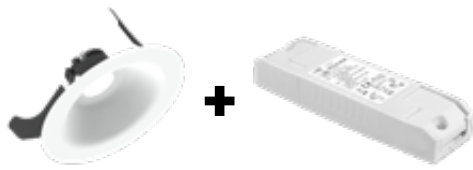

3000K CRI95 3275LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° No dim | 87SW03XX2U02 | 87SW03XX9K02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° 1-10V & Push | 87SW03XX2X02 | 87SW03XX9T02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° Dali | 87SW03XX2L02 | 87SW03XX9B02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° Casambi | 87SW03XX2M02 | 87SW03XX9C02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° No dim | 87SW03XX2V02 | 87SW03XX9L02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° 1-10V & Push | 87SW03XX2Y02 | 87SW03XX9U02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° Dali | 87SW03XX2P02 | 87SW03XX9E02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° Casambi | 87SW03XX2Q02 | 87SW03XX9F02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° No dim | 87SW03XX2W02 | 87SW03XX9M02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° 1-10V & Push | 87SW03XX2Z02 | 87SW03XX9V02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° Dali | 87SW03XX2S02 | 87SW03XX9H02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° Casambi | 87SW03XX2T02 | 87SW03XX9J02 | incl. PSU | 220-240V | 650 | 25,7 | 3275 | 127 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|-----|-----|------|------|--------|---------|--------|
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° No dim | 80 | 91 | 101 | 95 | 19.1 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° 1-10V & Push | 80 | 91 | 101 | 95 | 19.1 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° Dali | 80 | 91 | 101 | 95 | 19.1 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 24° Casambi | 80 | 91 | 101 | 95 | 19.1 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° No dim | 80 | 91 | 101 | 95 | 20.0 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° 1-10V & Push | 80 | 91 | 101 | 95 | 20.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° Dali | 80 | 91 | 101 | 95 | 20.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 60° Casambi | 80 | 91 | 101 | 95 | 20.0 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° No dim | 80 | 91 | 101 | 95 | 24.5 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° 1-10V & Push | 80 | 91 | 101 | 95 | 24.5 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° Dali | 80 | 91 | 101 | 95 | 24.5 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 3000K 3275Lm CRI95 80° Casambi | 80 | 91 | 101 | 95 | 24.5 | 0.95 | <3% | 5A 50µS | 50 pcs |



ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 3000K 3275Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >127.000 hrs | >127.000 hrs | >127.000 hrs |

All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

LINEA 185

Downlight incl. PSU

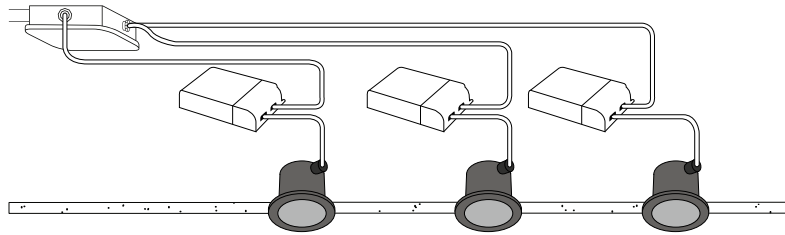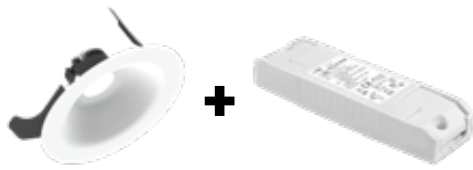

4000K CRI95 1425/1925LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° No dim | 87SE03XX2U02 | 87SE03XX9K02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1925Lm CRI95 24° Triac | 87SE03XX2K02 | 87SE03XX9A02 | incl. PSU | 220-240V | 350 | 13,2 | 1925 | 145 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° 1-10V & Push | 87SE03XX2X02 | 87SE03XX9T02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° Dali | 87SE03XX2L02 | 87SE03XX9B02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° Casambi | 87SE03XX2M02 | 87SE03XX9C02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° No dim | 87SE03XX2V02 | 87SE03XX9L02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1925Lm CRI95 60° Triac | 87SE03XX2N02 | 87SE03XX9D02 | incl. PSU | 220-240V | 350 | 13,2 | 1925 | 145 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° 1-10V & Push | 87SE03XX2Y02 | 87SE03XX9U02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° Dali | 87SE03XX2P02 | 87SE03XX9E02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° Casambi | 87SE03XX2Q02 | 87SE03XX9F02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° No dim | 87SE03XX2W02 | 87SE03XX9M02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1925Lm CRI95 80° Triac | 87SE03XX2R02 | 87SE03XX9G02 | incl. PSU | 220-240V | 350 | 13,2 | 1925 | 145 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° 1-10V & Push | 87SE03XX2Z02 | 87SE03XX9V02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° Dali | 87SE03XX2S02 | 87SE03XX9H02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° Casambi | 87SE03XX2T02 | 87SE03XX9J02 | incl. PSU | 220-240V | 250 | 9,3 | 1425 | 153 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|----|-----|------|------|--------|------------|--------|
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° No dim | 83 | 91 | 99 | 94 | 16.2 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 4000K 1925Lm CRI95 24° Triac | 83 | 91 | 99 | 94 | 17.3 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° 1-10V & Push | 83 | 91 | 99 | 94 | 16.2 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° Dali | 83 | 91 | 99 | 94 | 16.2 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 24° Casambi | 83 | 91 | 99 | 94 | 16.2 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° No dim | 83 | 91 | 99 | 94 | 17.1 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 4000K 1925Lm CRI95 60° Triac | 83 | 91 | 99 | 94 | 18.1 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° 1-10V & Push | 83 | 91 | 99 | 94 | 17.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° Dali | 83 | 91 | 99 | 94 | 17.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 60° Casambi | 83 | 91 | 99 | 94 | 17.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° No dim | 83 | 91 | 99 | 94 | 21.6 | 0.85 | <3% | 21A 180μS | 50 pcs |
| Linea 185 LV-HE 4000K 1925Lm CRI95 80° Triac | 83 | 91 | 99 | 94 | 22.6 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° 1-10V & Push | 83 | 91 | 99 | 94 | 21.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° Dali | 83 | 91 | 99 | 94 | 21.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 1425Lm CRI95 80° Casambi | 83 | 91 | 99 | 94 | 21.6 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|------------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV-HE 4000K 1425Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |
| Linea 185 LV-HE 4000K 1925Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |

All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

30-04-2026

LINEA 185 LV-HE

Downlight incl. PSU

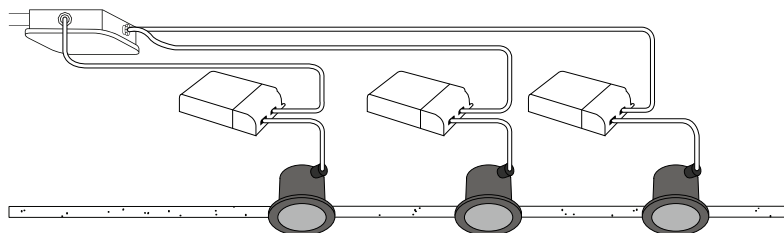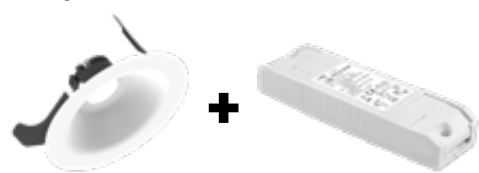

4000K CRI95 2200/2700LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° No dim | 87SG03XX2U02 | 87SG03XX9K02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2700Lm CRI95 24° Triac | 87SG03XX2K02 | 87SG03XX9A02 | incl. PSU | 220-240V | 500 | 19,3 | 2700 | 140 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° 1-10V & Push | 87SG03XX2X02 | 87SG03XX9T02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° Dali | 87SG03XX2L02 | 87SG03XX9B02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° Casambi | 87SG03XX2M02 | 87SG03XX9C02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° No dim | 87SG03XX2V02 | 87SG03XX9L02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2700Lm CRI95 60° Triac | 87SG03XX2N02 | 87SG03XX9D02 | incl. PSU | 220-240V | 500 | 19,3 | 2700 | 140 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° 1-10V & Push | 87SG03XX2Y02 | 87SG03XX9U02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° Dali | 87SG03XX2P02 | 87SG03XX9E02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° Casambi | 87SG03XX2Q02 | 87SG03XX9F02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° No dim | 87SG03XX2W02 | 87SG03XX9M02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2700Lm CRI95 80° Triac | 87SG03XX2R02 | 87SG03XX9G02 | incl. PSU | 220-240V | 500 | 19,3 | 2700 | 140 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° 1-10V & Push | 87SG03XX2Z02 | 87SG03XX9V02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° Dali | 87SG03XX2S02 | 87SG03XX9H02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° Casambi | 87SG03XX2T02 | 87SG03XX9J02 | incl. PSU | 220-240V | 400 | 15,2 | 2200 | 144 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|----|-----|------|------|--------|------------|--------|
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° No dim | 83 | 91 | 99 | 94 | 17.7 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV-HE 4000K 2700Lm CRI95 24° Triac | 83 | 91 | 99 | 94 | 18.5 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° 1-10V & Push | 83 | 91 | 99 | 94 | 17.7 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° Dali | 83 | 91 | 99 | 94 | 17.7 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 24° Casambi | 83 | 91 | 99 | 94 | 17.7 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° No dim | 83 | 91 | 99 | 94 | 18.6 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV-HE 4000K 2700Lm CRI95 60° Triac | 83 | 91 | 99 | 94 | 19.3 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° 1-10V & Push | 83 | 91 | 99 | 94 | 18.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° Dali | 83 | 91 | 99 | 94 | 18.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 60° Casambi | 83 | 91 | 99 | 94 | 18.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° No dim | 83 | 91 | 99 | 94 | 23.1 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV-HE 4000K 2700Lm CRI95 80° Triac | 83 | 91 | 99 | 94 | 23.8 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° 1-10V & Push | 83 | 91 | 99 | 94 | 23.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° Dali | 83 | 91 | 99 | 94 | 23.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV-HE 4000K 2200Lm CRI95 80° Casambi | 83 | 91 | 99 | 94 | 23.1 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 4000K 2200Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |
| Linea 185 LV 4000K 2700Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |



All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

30-04-2026

LINEA 185 LV-HE

4000K CRI95 3375LM

Downlight incl. PSU

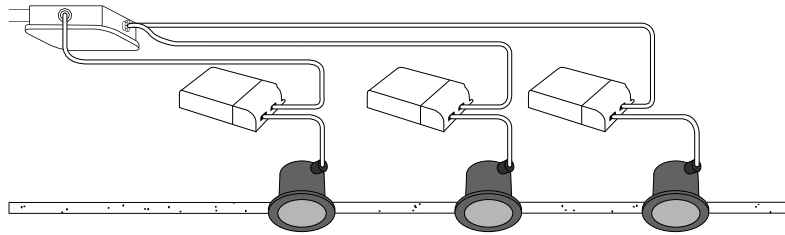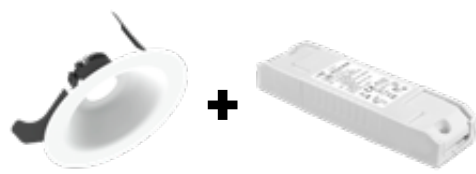

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|---|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° No dim | 87SX03XX2U02 | 87SX03XX9K02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° 1-10V & Push | 87SX03XX2X02 | 87SX03XX9T02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° Dali | 87SX03XX2L02 | 87SX03XX9B02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° Casambi | 87SX03XX2M02 | 87SX03XX9C02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° No dim | 87SX03XX2V02 | 87SX03XX9L02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° 1-10V & Push | 87SX03XX2Y02 | 87SX03XX9U02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° Dali | 87SX03XX2P02 | 87SX03XX9E02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° Casambi | 87SX03XX2Q02 | 87SX03XX9F02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° No dim | 87SX03XX2W02 | 87SX03XX9M02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° 1-10V & Push | 87SX03XX2Z02 | 87SX03XX9V02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° Dali | 87SX03XX2S02 | 87SX03XX9H02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° Casambi | 87SX03XX2T02 | 87SX03XX9J02 | incl. PSU | 220-240V | 650 | 25,7 | 3375 | 131 | 95 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|---|----|----|----|-----|------|------|--------|---------|--------|
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° No dim | 83 | 91 | 99 | 94 | 19.2 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° 1-10V & Push | 83 | 91 | 99 | 94 | 19.2 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° Dali | 83 | 91 | 99 | 94 | 19.2 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 24° Casambi | 83 | 91 | 99 | 94 | 19.2 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° No dim | 83 | 91 | 99 | 94 | 20.1 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° 1-10V & Push | 83 | 91 | 99 | 94 | 20.1 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° Dali | 83 | 91 | 99 | 94 | 20.1 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 60° Casambi | 83 | 91 | 99 | 94 | 20.1 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° No dim | 83 | 91 | 99 | 94 | 24.6 | 0.98 | <5% | 7A 13µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° 1-10V & Push | 83 | 91 | 99 | 94 | 24.6 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° Dali | 83 | 91 | 99 | 94 | 24.6 | 0.95 | <3% | 5A 50µS | 50 pcs |
| Linea 185 LV-HE 4000K 3375Lm CRI95 80° Casambi | 83 | 91 | 99 | 94 | 24.6 | 0.95 | <3% | 5A 50µS | 50 pcs |


ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime | | | Reported Lifetime* | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|-------------------|-------------|-------------|--------------------|--------------|--------------|
| | | | | | | L70B10 | L80B10 | L90B10 | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 4000K 3375Lm CRI95 | II | D | 880 gr | 233x233x85 mm | 20 pcs | 653.000 hrs | 529.000 hrs | 465.000 hrs | >105.000 hrs | >105.000 hrs | >105.000 hrs |


All values are measured at 230V (+/- 7%). * Based on 19.000hrs of LM80 testing at 1200mA and a Tc85°C.

LINEA 185 LV

Downlight incl. PSU

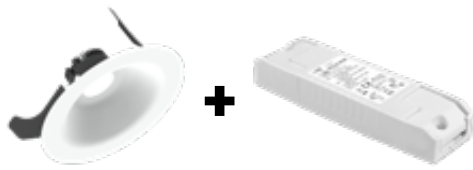

2700K CRI97 1150LM

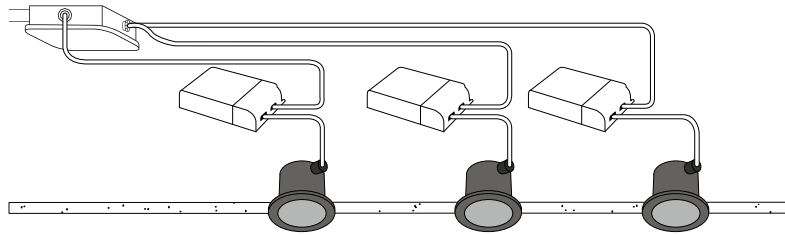

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 2700K 1150Lm CRI97 24° No dim | 875A03XX2U02 | 875A03XX9K02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 24° Triac | 875A03XX2K02 | 875A03XX9A02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 24° 1-10V & Push | 875A03XX2X02 | 875A03XX9T02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 24° Dali | 875A03XX2L02 | 875A03XX9B02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 24° Casambi | 875A03XX2M02 | 875A03XX9C02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 60° No dim | 875A03XX2V02 | 875A03XX9L02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 60° Triac | 875A03XX2N02 | 875A03XX9D02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 60° 1-10V & Push | 875A03XX2Y02 | 875A03XX9U02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 60° Dali | 875A03XX2P02 | 875A03XX9E02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 60° Casambi | 875A03XX2Q02 | 875A03XX9F02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 80° No dim | 875A03XX2W02 | 875A03XX9M02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 80° Triac | 875A03XX2R02 | 875A03XX9G02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 80° 1-10V & Push | 875A03XX2Z02 | 875A03XX9V02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 80° Dali | 875A03XX2S02 | 875A03XX9H02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |
| Linea 185 LV 2700K 1150Lm CRI97 80° Casambi | 875A03XX2T02 | 875A03XX9J02 | incl. PSU | 220-240V | 350 | 13,8 | 1150 | 83 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV 2700K 1150Lm CRI97 24° No dim | 93 | 96 | 103 | 99 | 15.5 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 24° Triac | 93 | 96 | 103 | 99 | 15.5 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 24° 1-10V & Push | 93 | 96 | 103 | 99 | 15.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 24° Dali | 93 | 96 | 103 | 99 | 15.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 24° Casambi | 93 | 96 | 103 | 99 | 15.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 60° No dim | 93 | 96 | 103 | 99 | 16.3 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 60° Triac | 93 | 96 | 103 | 99 | 16.3 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 60° 1-10V & Push | 93 | 96 | 103 | 99 | 16.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 60° Dali | 93 | 96 | 103 | 99 | 16.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 60° Casambi | 93 | 96 | 103 | 99 | 16.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 80° No dim | 93 | 96 | 103 | 99 | 20.8 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 80° Triac | 93 | 96 | 103 | 99 | 20.8 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 80° 1-10V & Push | 93 | 96 | 103 | 99 | 20.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 80° Dali | 93 | 96 | 103 | 99 | 20.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1150Lm CRI97 80° Casambi | 93 | 96 | 103 | 99 | 20.8 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)


| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 2700K 1150Lm CRI97 | II | F | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)


30-04-2026

LINEA 185 LV

Downlight incl. PSU

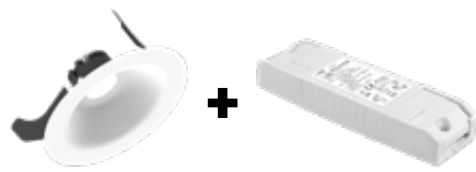

2700K CRI97 1625LM

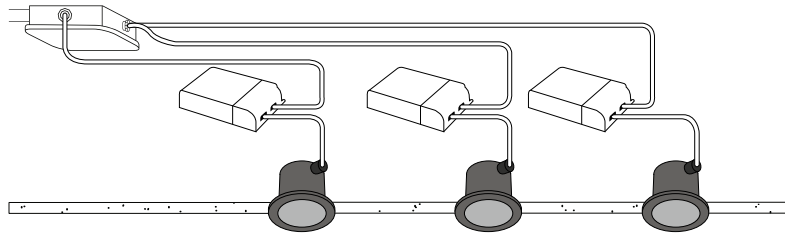

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 2700K 1625Lm CRI97 24° No dim | 875K03XX2U02 | 875K03XX9K02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 24° Triac | 875K03XX2K02 | 875K03XX9A02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 24° 1-10V & Push | 875K03XX2X02 | 875K03XX9T02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 24° Dali | 875K03XX2L02 | 875K03XX9B02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 24° Casambi | 875K03XX2M02 | 875K03XX9C02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 60° No dim | 875K03XX2V02 | 875K03XX9L02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 60° Triac | 875K03XX2N02 | 875K03XX9D02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 60° 1-10V & Push | 875K03XX2Y02 | 875K03XX9U02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 60° Dali | 875K03XX2P02 | 875K03XX9E02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 60° Casambi | 875K03XX2Q02 | 875K03XX9F02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 80° No dim | 875K03XX2W02 | 875K03XX9M02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 80° Triac | 875K03XX2R02 | 875K03XX9G02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 80° 1-10V & Push | 875K03XX2Z02 | 875K03XX9V02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 80° Dali | 875K03XX2S02 | 875K03XX9H02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |
| Linea 185 LV 2700K 1625Lm CRI97 80° Casambi | 875K03XX2T02 | 875K03XX9J02 | incl. PSU | 220-240V | 500 | 20,1 | 1625 | 81 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV 2700K 1625Lm CRI97 24° No dim | 93 | 96 | 103 | 99 | 16.7 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 24° Triac | 93 | 96 | 103 | 99 | 16.7 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 24° 1-10V & Push | 93 | 96 | 103 | 99 | 16.7 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 24° Dali | 93 | 96 | 103 | 99 | 16.7 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 24° Casambi | 93 | 96 | 103 | 99 | 16.7 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 60° No dim | 93 | 96 | 103 | 99 | 17.5 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 60° Triac | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 60° 1-10V & Push | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 60° Dali | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 60° Casambi | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 80° No dim | 93 | 96 | 103 | 99 | 22.0 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 80° Triac | 93 | 96 | 103 | 99 | 22.0 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 80° 1-10V & Push | 93 | 96 | 103 | 99 | 22.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 80° Dali | 93 | 96 | 103 | 99 | 22.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 1625Lm CRI97 80° Casambi | 93 | 96 | 103 | 99 | 22.0 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 2700K 1625Lm CRI97 | II | F | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

30-04-2026

LINEA 185 LV

Downlight incl. PSU

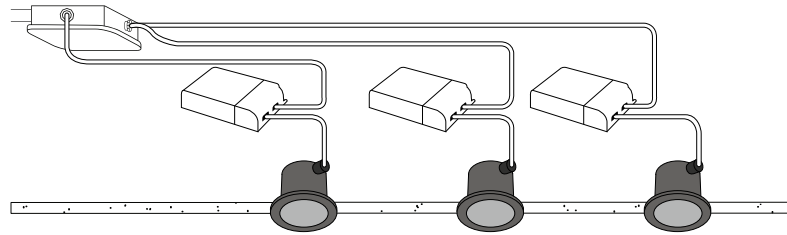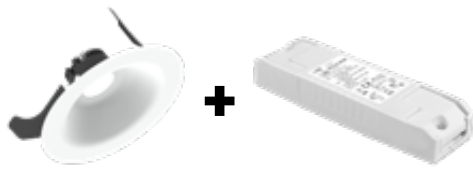

2700K CRI97 2050LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 2700K 2050Lm CRI97 24° No dim | 875N03XX2U02 | 875N03XX9K02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 24° 1-10V & Push | 875N03XX2X02 | 875N03XX9T02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 24° Dali | 875N03XX2L02 | 875N03XX9B02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 24° Casambi | 875N03XX2M02 | 875N03XX9C02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 60° No dim | 875N03XX2V02 | 875N03XX9L02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 60° 1-10V & Push | 875N03XX2Y02 | 875N03XX9U02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 60° Dali | 875N03XX2P02 | 875N03XX9E02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 60° Casambi | 875N03XX2Q02 | 875N03XX9F02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 80° No dim | 875N03XX2W02 | 875N03XX9M02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 80° 1-10V & Push | 875N03XX2Z02 | 875N03XX9V02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 80° Dali | 875N03XX2S02 | 875N03XX9H02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |
| Linea 185 LV 2700K 2050Lm CRI97 80° Casambi | 875N03XX2T02 | 875N03XX9J02 | incl. PSU | 220-240V | 650 | 26,0 | 2050 | 79 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|---------|--------|
| Linea 185 LV 2700K 2050Lm CRI97 24° No dim | 93 | 96 | 103 | 99 | 17.5 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 24° 1-10V & Push | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 24° Dali | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 24° Casambi | 93 | 96 | 103 | 99 | 17.5 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 60° No dim | 93 | 96 | 103 | 99 | 18.3 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 60° 1-10V & Push | 93 | 96 | 103 | 99 | 18.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 60° Dali | 93 | 96 | 103 | 99 | 18.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 60° Casambi | 93 | 96 | 103 | 99 | 18.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 80° No dim | 93 | 96 | 103 | 99 | 22.8 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 80° 1-10V & Push | 93 | 96 | 103 | 99 | 22.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 80° Dali | 93 | 96 | 103 | 99 | 22.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 2700K 2050Lm CRI97 80° Casambi | 93 | 96 | 103 | 99 | 22.8 | 0.95 | <3% | 5A 50μS | 50 pcs |



ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 2700K 2050Lm CRI97 | II | F | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

LINEA 185 LV

Downlight incl. PSU

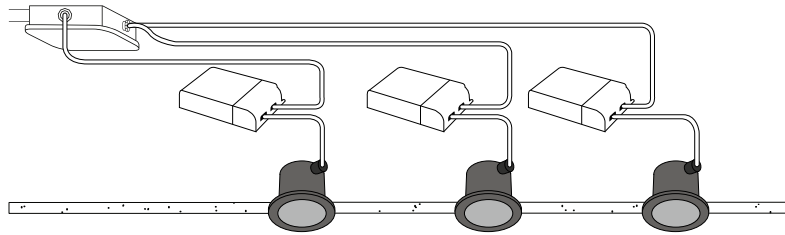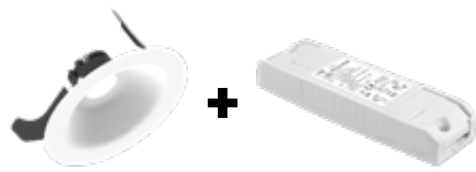

3000K CRI97 1250LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 3000K 1250Lm CRI97 24° No dim | 875B03XX2U02 | 875B03XX9K02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 24° Triac | 875B03XX2K02 | 875B03XX9A02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 24° 1-10V & Push | 875B03XX2X02 | 875B03XX9T02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 24° Dali | 875B03XX2L02 | 875B03XX9B02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 24° Casambi | 875B03XX2M02 | 875B03XX9C02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 60° No dim | 875B03XX2V02 | 875B03XX9L02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 60° Triac | 875B03XX2N02 | 875B03XX9D02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 60° 1-10V & Push | 875B03XX2Y02 | 875B03XX9U02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 60° Dali | 875B03XX2P02 | 875B03XX9E02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 60° Casambi | 875B03XX2Q02 | 875B03XX9F02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 80° No dim | 875B03XX2W02 | 875B03XX9M02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 80° Triac | 875B03XX2R02 | 875B03XX9G02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 80° 1-10V & Push | 875B03XX2Z02 | 875B03XX9V02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 80° Dali | 875B03XX2S02 | 875B03XX9H02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |
| Linea 185 LV 3000K 1250Lm CRI97 80° Casambi | 875B03XX2T02 | 875B03XX9J02 | incl. PSU | 220-240V | 350 | 13,8 | 1250 | 91 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV 3000K 1250Lm CRI97 24° No dim | 96 | 95 | 103 | 100 | 15.8 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 24° Triac | 96 | 95 | 103 | 100 | 15.8 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 24° 1-10V & Push | 96 | 95 | 103 | 100 | 15.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 24° Dali | 96 | 95 | 103 | 100 | 15.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 24° Casambi | 96 | 95 | 103 | 100 | 15.8 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 60° No dim | 96 | 95 | 103 | 100 | 16.6 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 60° Triac | 96 | 95 | 103 | 100 | 16.6 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 60° 1-10V & Push | 96 | 95 | 103 | 100 | 16.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 60° Dali | 96 | 95 | 103 | 100 | 16.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 60° Casambi | 96 | 95 | 103 | 100 | 16.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 80° No dim | 96 | 95 | 103 | 100 | 21.1 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 80° Triac | 96 | 95 | 103 | 100 | 21.1 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 80° 1-10V & Push | 96 | 95 | 103 | 100 | 21.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 80° Dali | 96 | 95 | 103 | 100 | 21.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1250Lm CRI97 80° Casambi | 96 | 95 | 103 | 100 | 21.1 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 3000K 1250Lm CRI97 | II | F | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

30-04-2026

LINEA 185 LV

Downlight incl. PSU

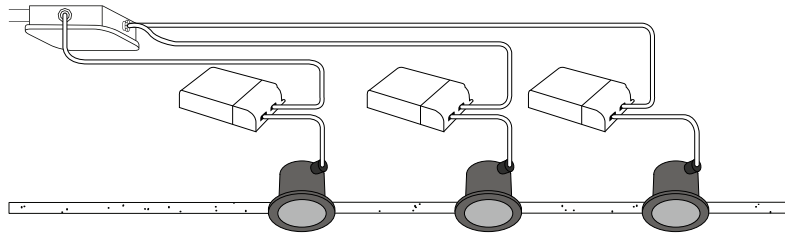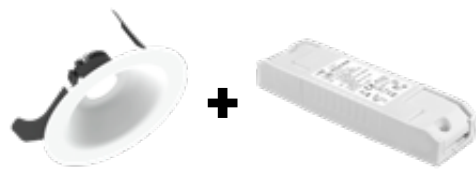

3000K CRI97 1800LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 3000K 1800Lm CRI97 24° No dim | 875L03XX2U02 | 875L03XX9K02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 24° Triac | 875L03XX2K02 | 875L03XX9A02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 24° 1-10V & Push | 875L03XX2X02 | 875L03XX9T02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 24° Dali | 875L03XX2L02 | 875L03XX9B02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 24° Casambi | 875L03XX2M02 | 875L03XX9C02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 60° No dim | 875L03XX2V02 | 875L03XX9L02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 60° Triac | 875L03XX2N02 | 875L03XX9D02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 60° 1-10V & Push | 875L03XX2Y02 | 875L03XX9U02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 60° Dali | 875L03XX2P02 | 875L03XX9E02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 60° Casambi | 875L03XX2Q02 | 875L03XX9F02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 80° No dim | 875L03XX2W02 | 875L03XX9M02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 80° Triac | 875L03XX2R02 | 875L03XX9G02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 80° 1-10V & Push | 875L03XX2Z02 | 875L03XX9V02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 80° Dali | 875L03XX2S02 | 875L03XX9H02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |
| Linea 185 LV 3000K 1800Lm CRI97 80° Casambi | 875L03XX2T02 | 875L03XX9J02 | incl. PSU | 220-240V | 500 | 20,1 | 1800 | 89 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV 3000K 1800Lm CRI97 24° No dim | 96 | 95 | 103 | 100 | 17.0 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 24° Triac | 96 | 95 | 103 | 100 | 17.0 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 24° 1-10V & Push | 96 | 95 | 103 | 100 | 17.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 24° Dali | 96 | 95 | 103 | 100 | 17.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 24° Casambi | 96 | 95 | 103 | 100 | 17.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 60° No dim | 96 | 95 | 103 | 100 | 17.9 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 60° Triac | 96 | 95 | 103 | 100 | 17.9 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 60° 1-10V & Push | 96 | 95 | 103 | 100 | 17.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 60° Dali | 96 | 95 | 103 | 100 | 17.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 60° Casambi | 96 | 95 | 103 | 100 | 17.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 80° No dim | 96 | 95 | 103 | 100 | 22.3 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 80° Triac | 96 | 95 | 103 | 100 | 22.3 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 80° 1-10V & Push | 96 | 95 | 103 | 100 | 22.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 80° Dali | 96 | 95 | 103 | 100 | 22.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 3000K 1800Lm CRI97 80° Casambi | 96 | 95 | 103 | 100 | 22.3 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 3000K 1800Lm CRI97 | II | F | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

30-04-2026

LINEA 185 LV

Downlight incl. PSU

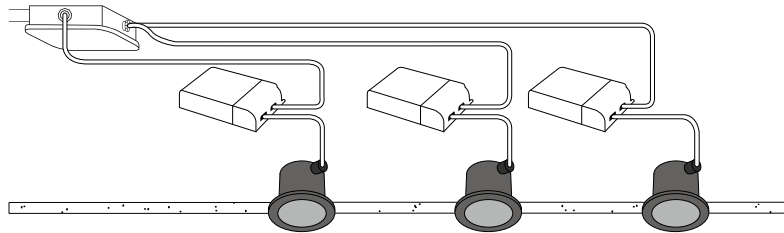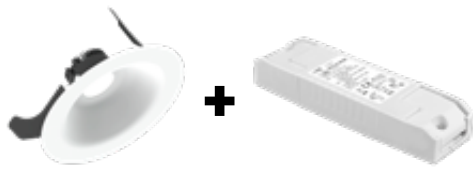

3000K CRI97 2250LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 3000K 2250Lm CRI97 24° No dim | 875P03XX2U02 | 875P03XX9K02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 24° 1-10V & Push | 875P03XX2X02 | 875P03XX9T02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 24° Dali | 875P03XX2L02 | 875P03XX9B02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 24° Casambi | 875P03XX2M02 | 875P03XX9C02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 60° No dim | 875P03XX2V02 | 875P03XX9L02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 60° 1-10V & Push | 875P03XX2Y02 | 875P03XX9U02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 60° Dali | 875P03XX2P02 | 875P03XX9E02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 60° Casambi | 875P03XX2Q02 | 875P03XX9F02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 80° No dim | 875P03XX2W02 | 875P03XX9M02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 80° 1-10V & Push | 875P03XX2Z02 | 875P03XX9V02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 80° Dali | 875P03XX2S02 | 875P03XX9H02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |
| Linea 185 LV 3000K 2250Lm CRI97 80° Casambi | 875P03XX2T02 | 875P03XX9J02 | incl. PSU | 220-240V | 650 | 26,0 | 2250 | 86 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|---------|--------|
| Linea 185 LV 3000K 2250Lm CRI97 24° No dim | 96 | 95 | 103 | 100 | 17.8 | 0.98 | <5% | 7A 13µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 24° 1-10V & Push | 96 | 95 | 103 | 100 | 17.8 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 24° Dali | 96 | 95 | 103 | 100 | 17.8 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 24° Casambi | 96 | 95 | 103 | 100 | 17.8 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 60° No dim | 96 | 95 | 103 | 100 | 18.7 | 0.98 | <5% | 7A 13µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 60° 1-10V & Push | 96 | 95 | 103 | 100 | 18.7 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 60° Dali | 96 | 95 | 103 | 100 | 18.7 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 60° Casambi | 96 | 95 | 103 | 100 | 18.7 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 80° No dim | 96 | 95 | 103 | 100 | 23.1 | 0.98 | <5% | 7A 13µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 80° 1-10V & Push | 96 | 95 | 103 | 100 | 23.1 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 80° Dali | 96 | 95 | 103 | 100 | 23.1 | 0.95 | <3% | 5A 50µs | 50 pcs |
| Linea 185 LV 3000K 2250Lm CRI97 80° Casambi | 96 | 95 | 103 | 100 | 23.1 | 0.95 | <3% | 5A 50µs | 50 pcs |



ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 3000K 2250Lm CRI97 | II | F | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

LINEA 185

Downlight incl. PSU

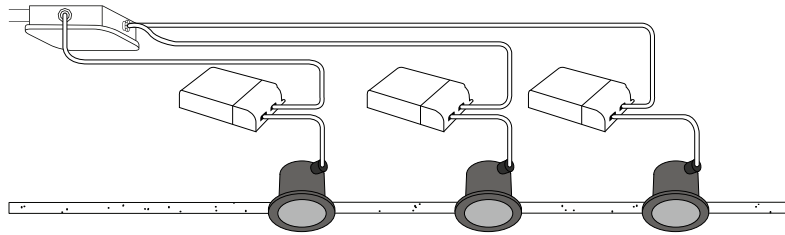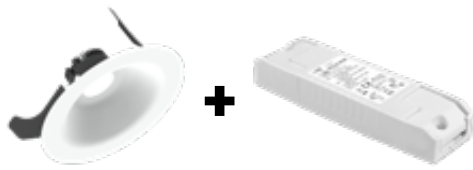

4000K CRI97 1350LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 4000K 1350Lm CRI97 24° No dim | 875G03XX2U02 | 875G03XX9K02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 24° Triac | 875G03XX2K02 | 875G03XX9A02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 24° 1-10V & Push | 875G03XX2X02 | 875G03XX9T02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 24° Dali | 875G03XX2L02 | 875G03XX9B02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 24° Casambi | 875G03XX2M02 | 875G03XX9C02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 60° No dim | 875G03XX2V02 | 875G03XX9L02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 60° Triac | 875G03XX2N02 | 875G03XX9D02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 60° 1-10V & Push | 875G03XX2Y02 | 875G03XX9U02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 60° Dali | 875G03XX2P02 | 875G03XX9E02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 60° Casambi | 875G03XX2Q02 | 875G03XX9F02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 80° No dim | 875G03XX2W02 | 875G03XX9M02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 80° Triac | 875G03XX2R02 | 875G03XX9G02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 80° 1-10V & Push | 875G03XX2Z02 | 875G03XX9V02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 80° Dali | 875G03XX2S02 | 875G03XX9H02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |
| Linea 185 LV 4000K 1350Lm CRI97 80° Casambi | 875G03XX2T02 | 875G03XX9J02 | incl. PSU | 220-240V | 350 | 13,8 | 1350 | 98 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV 4000K 1350Lm CRI97 24° No dim | 96 | 95 | 103 | 100 | 16.0 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 24° Triac | 96 | 95 | 103 | 100 | 16.0 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 24° 1-10V & Push | 96 | 95 | 103 | 100 | 16.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 24° Dali | 96 | 95 | 103 | 100 | 16.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 24° Casambi | 96 | 95 | 103 | 100 | 16.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 60° No dim | 96 | 95 | 103 | 100 | 16.9 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 60° Triac | 96 | 95 | 103 | 100 | 16.9 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 60° 1-10V & Push | 96 | 95 | 103 | 100 | 16.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 60° Dali | 96 | 95 | 103 | 100 | 16.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 60° Casambi | 96 | 95 | 103 | 100 | 16.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 80° No dim | 96 | 95 | 103 | 100 | 21.3 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 80° Triac | 96 | 95 | 103 | 100 | 21.3 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 80° 1-10V & Push | 96 | 95 | 103 | 100 | 21.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 80° Dali | 96 | 95 | 103 | 100 | 21.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1350Lm CRI97 80° Casambi | 96 | 95 | 103 | 100 | 21.3 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 4000K 1350Lm CRI97 | II | E | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

30-04-2026

LINEA 185 LV

Downlight incl. PSU

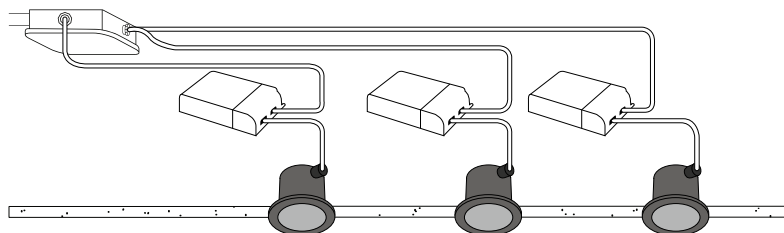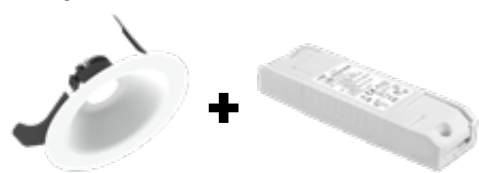

4000K CRI97 1925LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 4000K 1925Lm CRI97 24° No dim | 875M03XX2U02 | 875M03XX9K02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 24° Triac | 875M03XX2K02 | 875M03XX9A02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 24° 1-10V & Push | 875M03XX2X02 | 875M03XX9T02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 24° Dali | 875M03XX2L02 | 875M03XX9B02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 24° Casambi | 875M03XX2M02 | 875M03XX9C02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 60° No dim | 875M03XX2V02 | 875M03XX9L02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 60° Triac | 875M03XX2N02 | 875M03XX9D02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 60° 1-10V & Push | 875M03XX2Y02 | 875M03XX9U02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 60° Dali | 875M03XX2P02 | 875M03XX9E02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 60° Casambi | 875M03XX2Q02 | 875M03XX9F02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 80° No dim | 875M03XX2W02 | 875M03XX9M02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 80° Triac | 875M03XX2R02 | 875M03XX9G02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 80° 1-10V & Push | 875M03XX2Z02 | 875M03XX9V02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 80° Dali | 875M03XX2S02 | 875M03XX9H02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |
| Linea 185 LV 4000K 1925Lm CRI97 80° Casambi | 875M03XX2T02 | 875M03XX9J02 | incl. PSU | 220-240V | 500 | 20,1 | 1925 | 96 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|------------|--------|
| Linea 185 LV 4000K 1925Lm CRI97 24° No dim | 96 | 95 | 103 | 100 | 17.3 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 24° Triac | 96 | 95 | 103 | 100 | 17.3 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 24° 1-10V & Push | 96 | 95 | 103 | 100 | 17.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 24° Dali | 96 | 95 | 103 | 100 | 17.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 24° Casambi | 96 | 95 | 103 | 100 | 17.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 60° No dim | 96 | 95 | 103 | 100 | 18.1 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 60° Triac | 96 | 95 | 103 | 100 | 18.1 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 60° 1-10V & Push | 96 | 95 | 103 | 100 | 18.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 60° Dali | 96 | 95 | 103 | 100 | 18.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 60° Casambi | 96 | 95 | 103 | 100 | 18.1 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 80° No dim | 96 | 95 | 103 | 100 | 22.6 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 80° Triac | 96 | 95 | 103 | 100 | 22.6 | 0.95 | <9% | 8.4A 544μS | 85 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 80° 1-10V & Push | 96 | 95 | 103 | 100 | 22.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 80° Dali | 96 | 95 | 103 | 100 | 22.6 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 1925Lm CRI97 80° Casambi | 96 | 95 | 103 | 100 | 22.6 | 0.95 | <3% | 5A 50μS | 50 pcs |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 4000K 1925Lm CRI97 | II | E | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)

30-04-2026

LINEA 185

Downlight incl. PSU

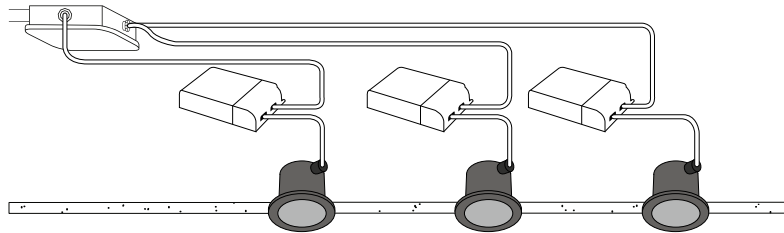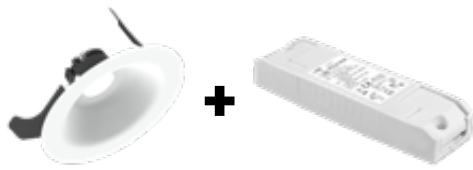

4000K CRI97 2400LM

ITEM SPECIFICATIONS (PART A)

| Description | Item code GS | Item code WS | Extra | Input | mA | W | Lm | Lm/W | CRI (typ.) |
|--|--------------|--------------|-----------|----------|-----|------|------|------|------------|
| Linea 185 LV 4000K 2400Lm CRI97 24° No dim | 875Q03XX2U02 | 875Q03XX9K02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 24° 1-10V & Push | 875Q03XX2X02 | 875Q03XX9T02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 24° Dali | 875Q03XX2L02 | 875Q03XX9B02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 24° Casambi | 875Q03XX2M02 | 875Q03XX9C02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 60° No dim | 875Q03XX2V02 | 875Q03XX9L02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 60° 1-10V & Push | 875Q03XX2Y02 | 875Q03XX9U02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 60° Dali | 875Q03XX2P02 | 875Q03XX9E02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 60° Casambi | 875Q03XX2Q02 | 875Q03XX9F02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 80° No dim | 875Q03XX2W02 | 875Q03XX9M02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 80° 1-10V & Push | 875Q03XX2Z02 | 875Q03XX9V02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 80° Dali | 875Q03XX2S02 | 875Q03XX9H02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |
| Linea 185 LV 4000K 2400Lm CRI97 80° Casambi | 875Q03XX2T02 | 875Q03XX9J02 | incl. PSU | 220-240V | 650 | 26,0 | 2400 | 92 | 97 |

ITEM SPECIFICATIONS (PART B)

| Description | R9 | Rf | Rg | R15 | UGR | Pf | Ripple | Inrush | B16A |
|--|----|----|-----|-----|------|------|--------|---------|--------|
| Linea 185 LV 4000K 2400Lm CRI97 24° No dim | 96 | 95 | 103 | 100 | 18.0 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 24° 1-10V & Push | 96 | 95 | 103 | 100 | 18.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 24° Dali | 96 | 95 | 103 | 100 | 18.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 24° Casambi | 96 | 95 | 103 | 100 | 18.0 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 60° No dim | 96 | 95 | 103 | 100 | 18.9 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 60° 1-10V & Push | 96 | 95 | 103 | 100 | 18.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 60° Dali | 96 | 95 | 103 | 100 | 18.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 60° Casambi | 96 | 95 | 103 | 100 | 18.9 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 80° No dim | 96 | 95 | 103 | 100 | 23.3 | 0.98 | <5% | 7A 13μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 80° 1-10V & Push | 96 | 95 | 103 | 100 | 23.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 80° Dali | 96 | 95 | 103 | 100 | 23.3 | 0.95 | <3% | 5A 50μS | 50 pcs |
| Linea 185 LV 4000K 2400Lm CRI97 80° Casambi | 96 | 95 | 103 | 100 | 23.3 | 0.95 | <3% | 5A 50μS | 50 pcs |


ITEM SPECIFICATIONS (PART C)

| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|---------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 4000K 2400Lm CRI97 | II | E | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |


All values are measured at 230V (+/- 7%)

LINEA 185 LV

Downlight incl. PSU

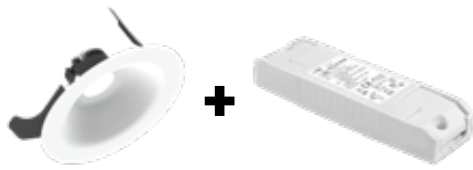

1800-3000K CRI97 1250LM

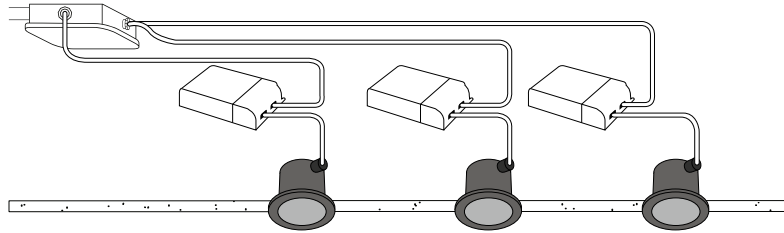

ITEM SPECIFICATIONS (PART A)

| Description | 24° | | | 60° | | | 80° | | |
|---|--------------|--------------|------|--------------|--------------|------|--------------|--------------|------|
| | Item code | | UGR | Item code | | UGR | Item code | | UGR |
| | GS | WS | | GS | WS | | GS | WS | |
| Linea 185 LV 1800-3000K 1250Lm CRI97 Triac | 875E03XX2K02 | 875E03XX9A02 | 15.8 | 875E03XX2N02 | 875E03XX9D02 | 16.6 | 875E03XX2R02 | 875E03XX9G02 | 21.1 |
| Linea 185 LV 1800-3000K 1250Lm CRI97 1-10V & Push | 875E03XX2X02 | 875E03XX9T02 | 15.8 | 875E03XX2Y02 | 875E03XX9U02 | 16.6 | 875E03XX2Z02 | 875E03XX9V02 | 21.1 |
| Linea 185 LV 1800-3000K 1250Lm CRI97 Dali | 875E03XX2L02 | 875E03XX9B02 | 15.8 | 875E03XX2P02 | 875E03XX9E02 | 16.6 | 875E03XX2S02 | 875E03XX9H02 | 21.1 |
| Linea 185 LV 1800-3000K 1250Lm CRI97 Casambi | 875E03XX2M02 | 875E03XX9C02 | 15.8 | 875E03XX2Q02 | 875E03XX9F02 | 16.6 | 875E03XX2T02 | 875E03XX9J02 | 21.1 |

ITEM SPECIFICATIONS (PART B)



| Description | CCT | W | Lm | Lm/W | CRI (typ.) | R9 | Rf | Rg | mA | Pf | Ripple | Inrush | B16A |
|---|------|------|------|------|------------|----|----|----|-----|-----|--------|--------|----------------|
| Linea 185 LV 1800-3000K 1250Lm CRI97 Triac | 100% | 3000 | 13,8 | 1250 | 91 | 97 | 93 | 95 | 102 | 350 | 0.95 | <3% | 2A 50µS 50 pcs |
| | 50% | 2500 | 6,9 | 625 | 90 | 94 | 90 | 95 | 105 | | | | |
| | 25% | 2200 | 3,4 | 300 | 88 | 93 | 94 | 93 | 105 | | | | |
| | 10% | 1800 | 1,4 | 125 | 89 | 92 | 97 | 86 | 110 | | | | |
| Linea 185 LV 1800-3000K 1250Lm CRI97 1-10V & Push | 100% | 3000 | 13,8 | 1250 | 91 | 97 | 93 | 95 | 102 | 350 | 0.95 | <3% | 5A 50µS 50 pcs |
| | 50% | 2500 | 6,9 | 625 | 90 | 94 | 90 | 95 | 105 | | | | |
| | 25% | 2200 | 3,4 | 300 | 88 | 93 | 94 | 93 | 105 | | | | |
| | 10% | 1800 | 1,4 | 125 | 89 | 92 | 97 | 86 | 110 | | | | |
| Linea 185 LV 1800-3000K 1250Lm CRI97 Dali | 100% | 3000 | 13,8 | 1250 | 91 | 97 | 93 | 95 | 102 | 350 | 0.95 | <3% | 5A 50µS 50 pcs |
| | 50% | 2500 | 6,9 | 625 | 90 | 94 | 90 | 95 | 105 | | | | |
| | 25% | 2200 | 3,4 | 300 | 88 | 93 | 94 | 93 | 105 | | | | |
| | 10% | 1800 | 1,4 | 125 | 89 | 92 | 97 | 86 | 110 | | | | |
| Linea 185 LV 1800-3000K 1250Lm CRI97 Casambi | 100% | 3000 | 13,8 | 1250 | 91 | 97 | 93 | 95 | 102 | 350 | 0.95 | <3% | 5A 50µS 50 pcs |
| | 50% | 2500 | 6,9 | 625 | 90 | 94 | 90 | 95 | 105 | | | | |
| | 25% | 2200 | 3,4 | 300 | 88 | 93 | 94 | 93 | 105 | | | | |
| | 10% | 1800 | 1,4 | 125 | 89 | 92 | 97 | 86 | 110 | | | | |

ITEM SPECIFICATIONS (PART C)



| Description | Safety class | Energy class | Weight | Dimensions single carton | Quantity per carton | Expected Lifetime B10 reported (25°C) | | |
|--------------------------------------|--------------|--------------|--------|--------------------------|---------------------|---------------------------------------|-------------|-------------|
| | | | | | | L70B10 | L80B10 | L90B10 |
| Linea 185 LV 1800-3000K 1250Lm CRI97 | II | G | 880 gr | 233x233x85 mm | 20 pcs | >60.500 hrs | >60.500 hrs | >60.500 hrs |

All values are measured at 230V (+/- 7%)



2700K

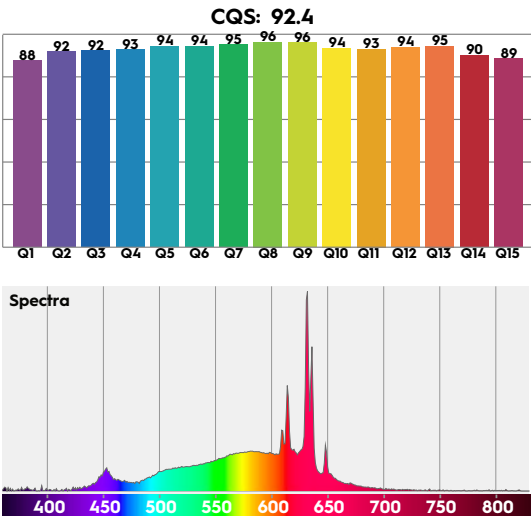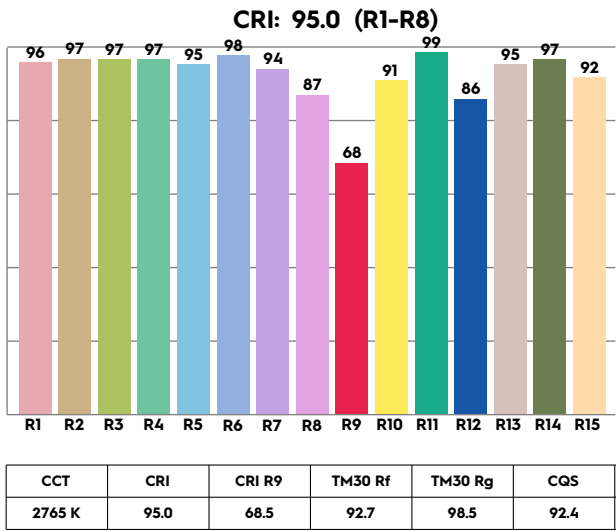



3000K

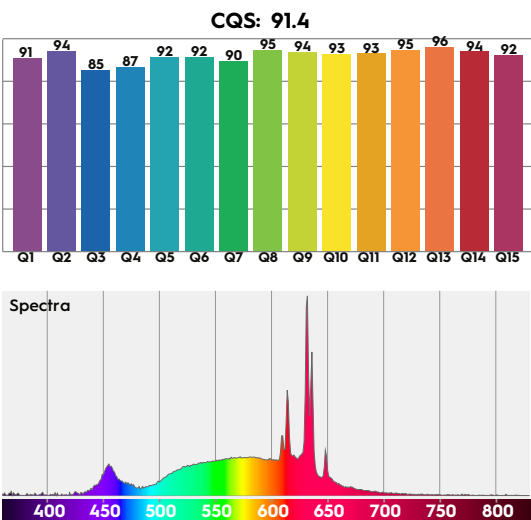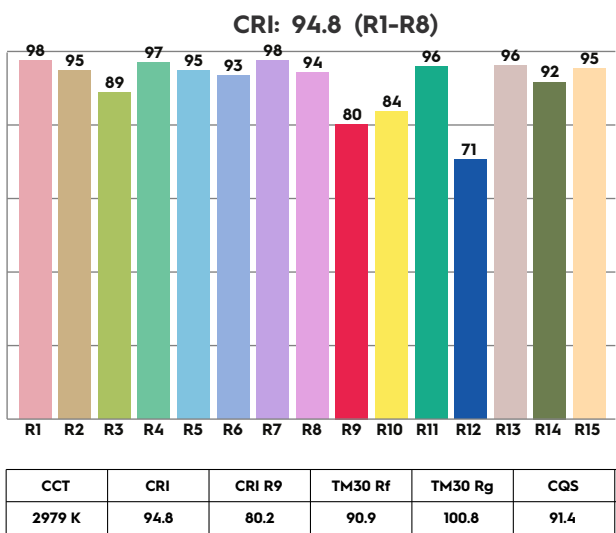



4000K

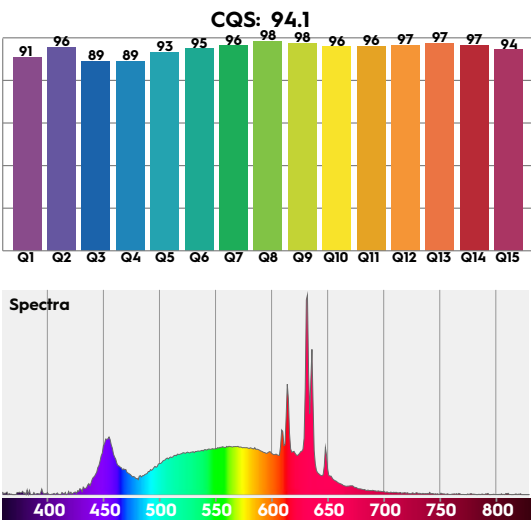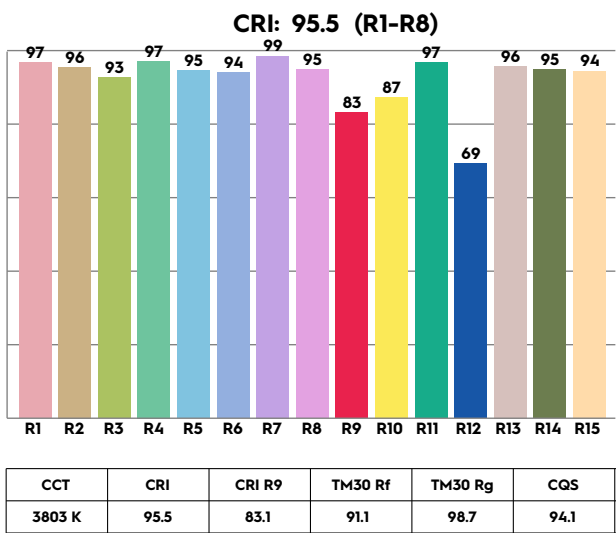

2700K

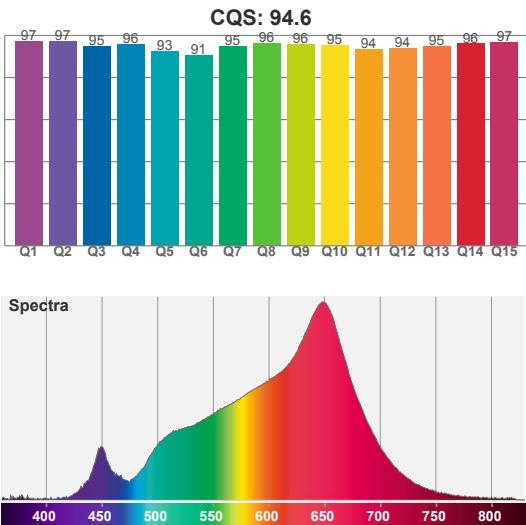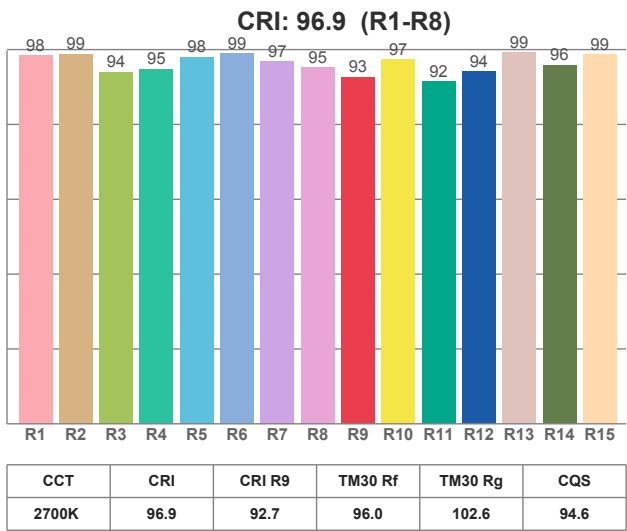

3000K

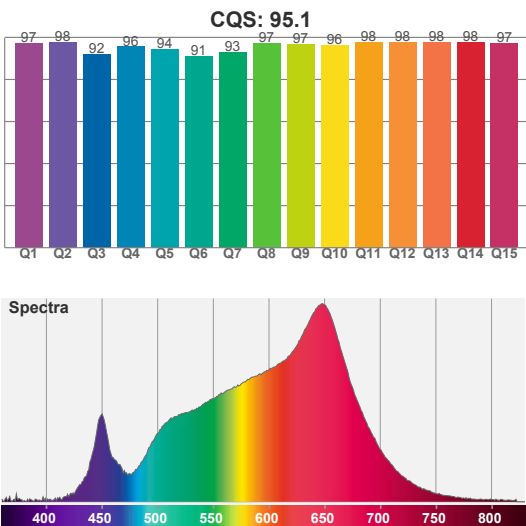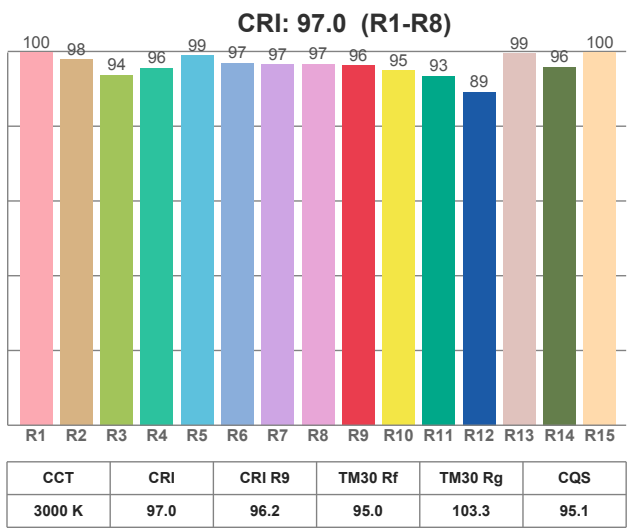

4000K

